

10/30/00
JC953 U.S. PRO

BAKER BOTTS LLP

30 ROCKEFELLER PLAZA
44TH FLOOR
NEW YORK, NEW YORK
10112-4498
212 705 5000
FAX 212 705 5020

AUSTIN
BAKU
DALLAS
HOUSTON
LONDON
MOSCOW
NEW YORK
WASHINGTON

Appln. Trans.
PATENT

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional
applications under 37 CFR 1.53(b))

Attorney Docket No. A33685

First Named Inventor Jae-Hong Park

Express Mail Label No. EK838861113US

Total Pages 67

JC953 U.S. PRO
09/699618
10/30/00

October 30, 2000

BY EXPRESS MAIL - Label No. EK839861113US

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Sir:

Enclosed herewith for filing is a patent application of Jae-Hong Park, Woon-Hee Hwang and Jeong-Hwa Ye
entitled METHOD FOR INTERFACING ASYNCHRONOUS MOBILE COMMUNICATION SYSTEM WITH AT
LEAST ONE CORE NETWORK

which includes:

<input checked="" type="checkbox"/> Specification	<u>37</u>	Total Pages
<input checked="" type="checkbox"/> Claims	<u>17</u>	Total Pages
<input checked="" type="checkbox"/> Abstract	<u>1</u>	Total Pages
<input checked="" type="checkbox"/> Drawing(s)	<u>18</u>	Total Sheets
<input checked="" type="checkbox"/> formal		
<input type="checkbox"/> informal		

☒ Combined Declaration and Power of Attorney 4 Total Pages

☒ Newly executed (original or copy)

☐ Copy from a prior application

(for continuation/divisional only - must be filed to avoid surcharge for late filing)

If a continuing application, check appropriate box:

☐ Continuation ☐ Divisional ☐ Continuation-In-Part (CIP)
of prior application No.

☐ Amend the specification by inserting, before the first line, the following sentence:

"This is a ☐ continuation ☐ divisional ☐ continuation-in-part
of copending application Serial No. filed ."

Appln. Trans.
PATENT

Attorney Docket No. A33685

- ☒ An Assignment of the invention to Hyundai Electronics Industries Co., Ltd.
☒ is attached. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
☐ will follow.
☐ has been filed in the prior application
- ☐ Small Entity Statement(s) **ENCLOSED**.
☐ Small Entity Statement filed in prior application. Status still proper and desired.
- ☐ Information Disclosure Statement (IDS) PTO-1449
☐ Copies of IDS Citations.

☐ Preliminary Amendment

☒ Return Receipt Postcard

☐ Other _

☐ Cancel in this application original claims _ of the prior application before calculating the filing fee.

The filing fee has been calculated as shown below:

FOR	(Col. 1)		(Col. 2)		Small Entity		Other Than A	
	<u>No. Filed</u>		<u>No. Extra</u>		<u>Rate</u>	<u>Fee</u>	OR	<u>Rate</u> <u>Fee</u>
Basic Fee								\$710.00
Total Claims	29	-20	=	9	x 9 =	\$0.00	x 18 =	\$162.00
Ind. Claims	3	-3	=	0	x 40 =	\$0.00	x 80 =	\$0.00
Multiple Dependent Claim					+ 135 =		+ 270 =	
					Total	<u>\$0.00</u>		<u>\$872.00</u>

* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

Fee Payment Being Made:

☒ Enclosed

☒ Basic filing fee \$872.00
☒ Recording Assignment \$40.00
 [\$40.00; 37 CFR 1.21(h)]
 Total Fees Enclosed \$912.00

☒ A check in the amount of \$872 & 40 to cover filing fee and assignment recordation fee is enclosed.

Appln. Trans.
PATENT

Attorney Docket No. A33685

Priority

[x] Priority of application Country Korea, Appln. No. 1999-46999 filed October 28, 1999 and 1999-51355 filed November 18, 1999, is claimed under 35 U.S.C. 119.

[x] Certified Copy of Priority Document(s) Country Korea, Appln. No. 1999-46999 filed October 28, 1999 and 1999-51355 filed November 18, 1999.

[x] is/are attached ☐ will follow ☐ has been filed in the parent application S/N .

[X] The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16, 1.17, and 1.21(h) associated with this communication or credit any overpayment to Deposit Account No. 02-4377. Two copies of this sheet are enclosed.

AKER BOTTS L.L.P.

By

Ronald B. Hildeth

PTO Registration No. 19,498

Enclosures

METHOD FOR INTERFACING ASYNCHRONOUS MOBILE
COMMUNICATION SYSTEM WITH AT LEAST ONE CORE NETWORK

Field of the Invention

5

The present invention relates in general to a method for interfacing an asynchronous mobile communication system with a least a core network; and, more particularly to a method for interfacing an asynchronous mobile communication system with a plurality of core networks each having a different operating type.

Description of the Prior Art

15

In a conventional synchronous mobile telecommunication system, a synchronous mobile station is connected to a synchronous radio network (for example, a CDMA-2000 radio network), which is in turn connected to an ANSI-41 core network.

20

In a conventional asynchronous mobile telecommunications system, an asynchronous mobile station is connected to an asynchronous radio network (for example, a universal mobile telecommunication system (UMTS) terrestrial radio access network (UTRAN)), which is in turn connected to a global system for mobile-communications-mobile application part (GSM-MAP) core network.

25

Fig. 1A is a view showing the core network interface

architecture of the conventional synchronous mobile telecommunications system. In this drawing, the reference numeral 11 denotes a synchronous mobile station, 12 denotes a synchronous radio network (i.e., a code division multiple access-2000 (CDMA-2000) radio network) which performs a data interfacing operation with the synchronous mobile station 11 and includes a synchronous base transceiver station/base station controller (BTS/BSC), and 13 denotes a synchronous core network, called ANSI-41 core network, which is connected to the synchronous radio network 12 and includes several systems such as mobile switching center (MSC) 14.

In the above core network interface architecture of the conventional synchronous mobile telecommunications system, the synchronous mobile station 11 can be connected to only the synchronous radio network 12 as well known to one skilled in the art, which is in turn connected to the synchronous core network 13, thereby allowing the synchronous mobile station 11 to be interfaced with only the synchronous core network 13.

Fig. 1B is a view showing the core network interface architecture of the conventional asynchronous mobile telecommunications system. In this drawing, the reference numeral 21 denotes an asynchronous mobile station, 22 denotes an asynchronous radio network (i.e., a UTRAN) which includes a base transceiver station (BTS) and a radio network controller (RNC), and 23 denotes an asynchronous core network, called GSM-MAP core network, which includes

several systems such as mobile switching center (MSC) 24.

In the above core network interface architecture of the conventional asynchronous mobile telecommunications system, the asynchronous mobile station 21 is connected to the asynchronous radio network 22 (i.e., UTRAN) which is in turn connected to the asynchronous core network 23, thereby allowing the asynchronous mobile station 21 to perform a data interfacing operation with the asynchronous core network 23.

Fig. 2A is a view showing the layered protocol structure of the conventional synchronous mobile telecommunications system. In this drawing, the reference numeral 30 denotes a synchronous mobile station, 40 a synchronous radio network and 50 a synchronous core network connected to the synchronous radio network 40.

The synchronous mobile station 30 includes a layer3 31, a layer2 35 and a layer1 36. The layer3 31 includes a synchronous call control (CC) entity 32 for management of a call and a synchronous mobility management (MM) entity 33 for management of a mobility.

The layer1 36 is a physical layer which offers data transport services to higher layers and transfers transport blocks over a radio interface.

The layer2 35 is a data link layer which includes following sub layers, a medium access control (MAC) sub layer and a radio link control (RLC) sub layer. However, the sub layers are not shown in this drawing.

The MAC sub layer offers data transfer services on logical channels to a higher layer (RLC sub layer) and on transport channels to a lower layer (the physical layer 36). The MAC sub layer is responsible for mapping of the logical channel onto the appropriate transports channel.

The RLC sub layer offers data transfer services on primitive to a higher layer and on logical channels to a lower layer (MAC sub layer). Also, the RLC sub layer performs an error correction, a duplicate detection, a ciphering and a flow control of the data.

The layer3 31 is a network layer which includes following sub layers, a synchronous radio resource (RR) sub layer, a synchronous call control (CC) entity 32 and a mobility management (MM) entity 33. In synchronous system, the synchronous RR sub layer is not apparently separated from the others in the layer3 31.

The RR sub layer offers data transfer services on primitive to a lower layer (RLC sub layer) and handles a control plane signaling of the layer3 31 between a user equipment (UE) and a synchronous radio network. The RR sub layer manages a radio resource. Also, the RR sub layer assigns/re-configures/releases the radio resource to UE/UTRAN.

The CC entity handles a call control signaling of layer3 between the UEs and the synchronous radio network.

The MM entity handles a mobility management signaling of layer3 between the user equipments (UEs) and the synchronous

radio network.

The layers 3 to 1 31, 35 and 36 in the synchronous mobile station 30 communicate with corresponding layers 41, 45 and 46 in the synchronous radio network 40.

5 The synchronous radio network 40 includes a layer3 41, a layer2 45 and a layer1 46. The layers 3 to 1 in the synchronous radio network 40 correspond respectively to those in the synchronous mobile station 30.

10 The layers 3 to 1 41, 45 and 46 in the synchronous radio network 40 communicate with corresponding layers 31, 35, 36, 51, 55 and 56 in the synchronous mobile station and the synchronous core network 50.

15 The synchronous core network 50 includes a layer3 51, a layer2 55 and a layer1 56. The layers 3 to 1 in the synchronous radio network 50 correspond respectively to those in the synchronous mobile station 30.

The layers 3 to 1 51, 55 and 56 in the synchronous core network 50 communicate with corresponding layers 41, 45 and 46 in the synchronous radio network 40.

20 In the conventional synchronous mobile station and radio network as the layered protocol structure, the synchronous mobile station 30 receives a Sync channel message from the synchronous radio network 40 over a Sync channel and acquires information necessary to its connection to the
25 synchronous core network 50, including information related to the synchronous core network 50 and information about the synchronous radio network 40, from the received Sync channel

message.

In other words, for interfacing with the synchronous ANSI-41 network via the synchronous radio network, the synchronous mobile station acquires system information (i.e.,
5 information related to the radio network and core network) through a system determination sub-state, a pilot channel acquisition sub-state, a Sync channel acquisition sub-state and a timing changing sub-state after it is powered on.

Fig. 2B is a view showing the layered protocol structure of the conventional asynchronous mobile telecommunications system. In this drawing, the reference numeral 60 denotes an asynchronous mobile station, 70 a UTRAN and 80 an asynchronous core network.

The asynchronous mobile station 60 includes a layer3 61,
15 a layer2 65 and a layer1 66. In particular, the layer3 61 includes a non-access stratum (NAS) part and an access stratum (AS) part. The NAS part includes an asynchronous call control (CC) part 62 for management of a call and an asynchronous mobility management (MM) part 63 for management
20 of a mobility. The AS part includes an asynchronous radio resource control (RRC) part. In the asynchronous system, the asynchronous RRC sub layer is apparently separated from the NAS part. Functions of the asynchronous RRC sub layer are the same as those of the synchronous RR sub layer.

25 The UTRAN 70 includes a layer3 71, a layer2 73 and a layer1 74. The layer3 71 of the UTRAN 70 has no NAS part having asynchronous CC part and asynchronous MM part. The

layers 3 to 1 of the UTRAN 70 are connected and correspond respectively to those in the asynchronous mobile station 60 and those in the asynchronous core network 80. However, since the UTRAN 70 does not have the NAS part, i.e., the asynchronous CC part and the asynchronous MM part, the NAS parts of the asynchronous mobile station 60 and the asynchronous core network 80 are coupled to each other not through the UTRAN 70.

The asynchronous core network 80 includes a layer3 having a NAS part 81 connected to that of the asynchronous mobile station 60 and a AS part, a layer2 85 and a layer1 86 connected respectively to those in the UTRAN 70. The NAS part includes an asynchronous CC part 82 for management of a call and an asynchronous MM part 83 for management of a mobility.

Functions of the layer 3 to 1 of the asynchronous system are similar with those of the synchronous system except for an operating type. Therefore, detailed description of the layer 3 to 1 will be skipped.

The more detailed descriptions about layered protocol structures are well taught in 3rd Generation Partnership Project (3GPP), Technical Specification Group (TSG) - Radio Access Network (RAN): 3G TS25.301 (Radio Interface Protocol Architecture), 3G TS25.302 (Services provided by the physical layer), 3G TS25.321 (MAC Protocol Specification), 3G TS25.322 (RLC Protocol Specification) and 3G TS25.331 (RRC Protocol Specification) in detail.

The synchronous mobile station 30 receives a synchronous channel message through a synchronous channel from the synchronous radio network 40, and obtains information necessary for connecting the mobile station to the core network, from the synchronous channel message. The synchronous channel message includes information related to the synchronous radio network and a core network connected thereto.

The asynchronous mobile station 60 receives a system information message through a broadcast channel (BCCH), and obtains information necessary for connecting the mobile station to the core network, from the system information message. The system information message includes information related to the asynchronous radio network and a core network connected thereto.

IMT-2000 systems are the third generation systems which aim to unify the various mobile communication networks and services into one to provide many mobile communication services. The systems can provide multimedia services under multi-environments through various air-interfaces and high capacity. Also, in the aspect of services, the systems can provide multimedia services of speech, image and data up to the rate of 2 Mbps and an international roaming. And, in the aspect of network, the systems are total systems which are based on ATM networks and combine fixed and wireless systems.

IMT-2000 system requires new system concept, high-level adaptation technology, and novel network technology, as well

all conventional technologies which were already adopted in the second digital cellular system.

As described above, in the next-generation mobile telecommunication system such as the IMT-2000 system, either the GSM-MAP network used in the above conventional asynchronous mobile telecommunications system or the ANSI-41 network used in the above conventional synchronous mobile telecommunications system should be employed as a core network in order to perform an international roaming in a synchronous or asynchronous mobile telecommunications system of an IMT-2000 system.

According to network deployment scenarios, the IMT-2000 system can have the following four interface architectures; first: synchronous mobile station - synchronous radio network - synchronous ANSI-41 network, second: synchronous mobile station - synchronous radio network - asynchronous GSM-MAP network, third: asynchronous mobile station - asynchronous radio network - synchronous ANSI-41 network and fourth: asynchronous mobile station - asynchronous radio network - asynchronous GSM-MAP network.

The IMT-2000 system has the four interface architectures as mentioned above. Therefore, the hybrid type synchronous mobile station must recognize an operating type of a core network currently connected thereto, and the hybrid type synchronous radio network should provide core network operating type information and others information to the hybrid type synchronous mobile station. The core network

operating type information and the others information must be contained in the Sync channel message that the synchronous mobile station, after being powered on, receives through the Sync channel in the above-mentioned conventional interfacing manner.

Similarly, the hybrid type asynchronous mobile station must recognize an operating type of a core network currently connected thereto, and the hybrid type asynchronous radio network should provide the core network operating type information and others information to the hybrid type asynchronous mobile station. The core network operating type information and the others information must be contained in the system information message transmitted to the asynchronous mobile station, after being powered on, so that the asynchronous mobile station receives through the broadcast control channel (BCCH) in the above-mentioned conventional interfacing manner.

Fig. 3A is a view showing a synchronous ANSI-41 core network interface architecture of a hybrid type synchronous radio network. In this drawing, the reference numeral 100 denotes a hybrid type synchronous mobile station, 110 a hybrid type synchronous radio network, and 120 a synchronous core network.

Fig. 3B is a view showing an asynchronous GSM-MAP core network interface architecture of the hybrid type synchronous radio network. In this drawing, the reference numeral 100 denotes a hybrid type synchronous mobile

station, 110 a hybrid type synchronous radio network, and 130 an asynchronous core network.

Fig. 3C is a view showing an asynchronous GSM-MAP core network interface architecture of a hybrid type asynchronous radio network. In this drawing, the reference numeral 210 denotes a hybrid type asynchronous mobile station, 220 denotes a hybrid type UTRAN which is a hybrid type asynchronous radio network, and 230 denotes a core network which is connected to the hybrid type UTRAN 220.

Fig. 3D is a view showing a synchronous ANSI-41 core network interface architecture of the hybrid type asynchronous radio network. In this drawing, the reference numeral 210 denotes a hybrid type asynchronous mobile station, 220 denotes a hybrid type UTRAN which is a hybrid type asynchronous radio network, and 240 denotes a core network which is connected to the hybrid type UTRAN 220.

In order to be operable adaptively to the above four interface architectures, each of the hybrid type synchronous and asynchronous mobile stations in the next-generation mobile telecommunications system has both asynchronous CC and MM protocol entities serving for the GSM-MAP core network and synchronous CC and MM protocol entities serving for the ANSI-41 core network at the layer3 in the protocol stack structure, which is a different from each of the conventional synchronous and asynchronous mobile stations.

Fig. 4A is a view showing the layered protocol structure of a hybrid type synchronous mobile station, a

hybrid type synchronous radio network and the synchronous ANSI-41 core network. In this drawing, the reference numeral 100 denotes a hybrid type synchronous mobile station, 110 denotes a hybrid type synchronous radio network, and 120 denotes an ANSI-41 core network which is a synchronous core network connected to the hybrid type synchronous radio network 110.

The hybrid type synchronous mobile station 100 includes a layer3 101, a layer2 107 and a layer1 108. The layer3 101 includes a synchronous CC part 102, a synchronous MM part 103, an asynchronous CC part 104, an asynchronous MM part 105 and a synchronous radio resource part 106. The hybrid type synchronous mobile station 100 selectively makes a CC/MM protocol active according to a core network operating type. Information for identifying the core network operating type is given to the hybrid type synchronous mobile station 100.

For example, if the hybrid type synchronous mobile station 100 is currently connected to the ANSI-41 core network 120, the layer3 101 therein activates protocols of the synchronous CC part 102 and synchronous MM part 103 to perform a message interfacing operation with the ANSI-41 core network 120.

The hybrid type synchronous radio network 110 includes a layer3 111, a layer2 115 and a layer1 116, which activate their protocols corresponding respectively to those in the hybrid type synchronous mobile station 100 and those in the

ANSI-41 core network 120 to transmit and receive messages.

The ANSI-41 core network 120 includes a layer3 121, a layer2 125 and a layer1 126. The layer3 121 includes a synchronous CC part 122, a synchronous MM part 123 and a synchronous RR part 124.

On the other hand, a hybrid type synchronous mobile station, a hybrid type synchronous radio network and an asynchronous core network have layered protocol structures as shown in Fig. 4B when the core network connected thereto is of an asynchronous operating type as shown in Fig. 3B.

In Fig. 4B, the reference numeral 100 denotes a hybrid type synchronous mobile station, 110 denotes a hybrid type synchronous radio network, and 130 denotes a GSM-MAP core network which is an asynchronous core network.

The hybrid type synchronous mobile station 100 includes a layer3 101 having a NAS part and an AS part, a layer2 107 and a layer1 108. The NAS part includes a synchronous CC part 102, a synchronous MM part 103, an asynchronous CC part 104 and an asynchronous MM part 105. The AS part includes a synchronous RR part 106. The hybrid type synchronous mobile station 100 selectively makes a CC/MM protocol active according to a core network operating type.

For example, if the hybrid type synchronous mobile station 100 is currently connected to the GSM-MAP core network 130, the layer3 101 therein activates protocols of the asynchronous CC part 104 and asynchronous MM part 105 to perform a message interfacing operation with the GSM-MAP

core network 130.

The hybrid type synchronous radio network 110 includes a layer3 111 having a NAS part and an AS part, a layer2 115 and a layer1 116, which activate their protocols corresponding respectively to those in the hybrid type synchronous mobile station 100 and those in the GSM-MAP core network 130 to transmit and receive messages.

The GSM-MAP core network 130 includes a layer3 131 having a NAS part and an AS part, a layer2 135 and a layer1 136. The NAS part includes an asynchronous CC part 132 and an asynchronous MM part 133. The AS part includes an asynchronous RRC part 134.

The layers 3 to 1 of the hybrid type synchronous radio network 110 are connected and correspond respectively to those in the hybrid type synchronous mobile station 100 and those in the asynchronous core network 130. However, the NAS parts of the hybrid type asynchronous mobile station 100 and the asynchronous core network 130 are coupled to each other not through the hybrid type synchronous mobile station 110.

Fig. 4C is a view showing layered protocol structures of a hybrid type asynchronous mobile station, a hybrid type synchronous radio network and a synchronous ANSI-41 core network. In this drawing, the reference numeral 210 denotes a hybrid type asynchronous mobile station, 220 denotes a hybrid type UTRAN which is a hybrid type asynchronous radio network, and 230 denotes an ANSI-41 core network connected to the hybrid type UTRAN 220.

The hybrid type asynchronous mobile station 210 includes a layer3 211, a layer2 217 and a layer1 218. The layer1 includes a synchronous CC part 212, a synchronous MM part 213, an asynchronous CC part 214, an asynchronous MM part 215 and asynchronous RRC part 216 and selectively activates a synchronous CC/MM protocol or an asynchronous CC/MM protocol.

For example, if the hybrid type asynchronous mobile station 210 is currently connected to the ANSI-41 core network 230, the layer1 therein activates a protocol between the synchronous CC part 211 and synchronous MM part 212 to perform a message interfacing operation with the ANSI-41 core network 230.

Fig. 4D is a view showing layered protocol structures of a hybrid type asynchronous mobile station, a hybrid type asynchronous radio network and an asynchronous GSM-MAP core network. In this drawing, the reference numeral 210 denotes a hybrid type asynchronous mobile station, 220 denotes hybrid type a UTRAN which is a hybrid type asynchronous radio network, and 240 denotes an asynchronous GSM-MAP core network connected to the hybrid type UTRAN 220.

The hybrid type asynchronous mobile station 210 includes a layer3 211 having a NAS part and an AS part, a layer2 217 and a layer1 218. The NAS part includes a synchronous CC part 212, a synchronous MM part 213, an asynchronous CC part 214 and an asynchronous MM part 215 and selectively activates a synchronous CC/MM protocol or an

asynchronous CC/MM protocol. The AS part includes an asynchronous RRC part 216.

The hybrid type synchronous radio network 210 includes a layer3 211 having a NAS part and an AS part, a layer2 225 and a layer1 226, which activate their protocols corresponding respectively to those in the hybrid type synchronous mobile station 210 and those in the GSM-MAP core network 240 to transmit and receive messages.

The GSM-MAP core network 240 includes a layer3 241 having a NAS part and an AS part, a layer2 245 and a layer1 246. The NAS part includes an asynchronous CC part 242 and an asynchronous MM part 243. The AS part includes an asynchronous RRC part 244.

For example, if the hybrid type asynchronous mobile station 210 is currently connected to the GSM-MAP core network 240, the NAS part therein activates protocols of the asynchronous CC part 214 and asynchronous MM part 215 to perform a message interfacing operation with the GSM-MAP core network 240.

The layers 3 to 1 of the hybrid type synchronous radio network 220 are connected and correspond respectively to those in the hybrid type synchronous mobile station 210 and those in the asynchronous core network 240. However, the NAS parts of the hybrid type asynchronous mobile station 210 and the asynchronous core network 240 are coupled to each other not through the hybrid type asynchronous mobile station 220.

A communication protocol between a synchronous mobile

station and a synchronous mobile network is referred to an Air-interface protocol. For example, an Interim Standard (IS)-2000 protocol is used as the Air-interface protocol.

A communication protocol between a synchronous mobile
5 network and a synchronous core network, for example, an ANSI-41 network is referred to an A-interface protocol. For example, a third generation interoperability specification (3G-IOS) is used as the A-interface protocol.

The IMT-2000 system has the four interface
10 architectures as mentioned above. Therefore, the synchronous mobile station must recognize an operating type of a core network currently connected thereto, and the synchronous radio network should provide core network operating type information and others information to the synchronous mobile
15 station. The core network operating type information and the others information must be contained in the Sync channel message that the synchronous mobile station, after being powered on, receives through the Sync channel in the above-mentioned conventional interfacing manner.

20 Similarly, the hybrid type asynchronous mobile station must recognize an operating type of a core network currently connected thereto, and the asynchronous radio network should provide the core network operating type information and others information to the asynchronous mobile station. The
25 core network operating type information and the others information must be contained in the system information message transmitted to the asynchronous mobile station,

after being powered on, so that the asynchronous mobile station receives through the broadcast control channel (BCCH) in the above-mentioned conventional interfacing manner.

5 The asynchronous radio network can recognize the operating type of the core network by communicating a message with the core network or by a hardware device including a dip switch. The asynchronous radio network inserts the core network type information into a
10 predetermined location of a system information message and transmits the system information message to the asynchronous mobile station, so that the asynchronous mobile station operates a call control (CC) entity and a mobility management (MM) entity based on the core network type
15 information. For example, the predetermined location is a master information block in which information for a control and a scheduling of a system information block is written. The master information block is necessarily included in the system information message.

20 However, the asynchronous mobile station can be coupled to two or more core networks each having a different operating type. For example, both of the asynchronous GSM-MAP core network and the synchronous ANSI-41 core network can be coupled to the asynchronous mobile communication
25 system.

 When the mobile communication system is coupled to two core networks each having a different operating type, the

asynchronous radio network should transmit both kinds of the core network type information to the asynchronous mobile station. In order to communicating between the asynchronous mobile communication system and the core network, one core network should be selected by the asynchronous mobile communication system. In other words, one of the asynchronous radio network or the asynchronous mobile station should select one of the core networks. At this time, it is more efficient that the mobile station selects, because the asynchronous radio network does not know capabilities of the asynchronous mobile station.

It is more efficient that the core network is selected by the asynchronous mobile station based on coverage and kinds of services provided by the mobile station and radio environments between the mobile station and the radio network.

one of the core networks. The reason to communicate therewith based on the received core network type information the asynchronous mobile station should select one core network to communicate therewith based on the received core network type information.

However, in the prior art, there is no method for selecting a core network, at the asynchronous mobile station, when a plurality of core networks each having a different operating type are coupled to the asynchronous mobile station. Accordingly, there is a problem in that the asynchronous mobile station cannot be interfaced with the

core network.

Summary of the Invention

5 Therefore, the present invention has been made in view of the above problems, and it is an object of the present invention to provide a method for interfacing an asynchronous mobile communication system and a core network, wherein the asynchronous mobile communication system is coupled to at least two core networks each having a different operating type.

10 In accordance with one aspect of the present invention, there is provided a method for a method for transmitting a message between a mobile communication system and at least a core network, the mobile communication system having a mobile station and a radio network, the method comprising the steps of: a) at the radio network, discriminating an operating type of a core network(s) coupled thereto; b) at the radio network, generating and transmitting a system information message having core network operating type information and information
15 related to the core network; c) if two or more core networks are coupled to the asynchronous mobile communication system, at the mobile station, selecting one core network to be communicated with, based on the system information message; d) operating a call control entity and a mobility management
20 entity according to an operating type of the selected core network; and e) communicating messages between the mobile station and the radio network, the message having a different

data format according to the operating type of the selected core network.

Brief Description of the Drawings

5

The above and other objects, features and advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

10 Fig. 1A is a view showing a core network interface architecture of the conventional synchronous mobile telecommunications system; and

15 Fig. 1B is a view showing a core network interface architecture of the conventional asynchronous mobile telecommunications system;

Fig. 2A is a view showing a layered protocol structure of the conventional synchronous mobile telecommunications system;

20 Fig. 2B is a view showing a layered protocol structure of the conventional asynchronous mobile telecommunications system;

Fig. 3A is a view showing a synchronous ANSI-41 core network interface architecture of hybrid type synchronous mobile station and radio network;

25 Fig. 3B is a view showing an asynchronous GSM-MAP core network interface architecture of hybrid type synchronous mobile station and radio network;

Fig. 3C is a view showing an asynchronous GSM-MAP core network interface architecture of hybrid type asynchronous mobile station and radio network;

Fig. 3D is a view showing a synchronous ANSI-41 core network interface architecture of hybrid type asynchronous mobile station and radio network;

Fig. 4A is a view showing layered protocol structures of hybrid type synchronous mobile station and radio network and the synchronous ANSI-41 core network;

Fig. 4B is a view showing layered protocol structures of hybrid type synchronous mobile station and radio network and the asynchronous GSM-MAP core network;

Fig. 4C is a view showing layered protocol structures of hybrid type asynchronous mobile station and radio network and the synchronous ANSI-41 core network;

Fig. 4D is a view showing layered protocol structures of hybrid type asynchronous mobile station and radio network and the asynchronous GSM-MAP core network;

Fig. 5 is a view showing an interface architecture of an asynchronous mobile station, an asynchronous radio network and two core networks each having a different operating type;

Fig. 6 is a view showing data structure of a master information block included in a system information message;

Figs. 7A and 7B are flow charts illustrating a method for interfacing a message at an asynchronous radio network in accordance with the present invention;

Figs. 8A and 8B are flow charts illustrating a method for interfacing a message at an asynchronous mobile station in accordance with an embodiment of the present invention; and

5 Figs. 9A to 9C are flow charts illustrating a method for interfacing a message at an synchronous mobile station in accordance with another embodiment of the present invention.

Detailed Description of the Preferred Embodiments

10 Hereinafter, the preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

15 Fig. 5 is a view showing an interface architecture of an asynchronous mobile station, an asynchronous radio network and two core networks each having a different operating type.

20 Reference numerals 210, 220, 230 and 240 denote an asynchronous mobile station, an asynchronous radio network, an asynchronous core network and a synchronous core network, respectively.

25 In order to adaptively set a protocol based on an operating type of the core network 230 or 240 connected thereto, the asynchronous radio network 220 should discriminate an operating type of a core network connected thereto and transmit core network operating type information and information relating to the core network to the

asynchronous mobile station 210. Also, the asynchronous radio network 220 converts a data format of a message received from the asynchronous mobile station 210 based on the operating type of the selected core network, and
5 transmits the converted message to the selected core network.

The asynchronous mobile station obtains information related to the core network from a master information block of a system information message broadcasted through a broadcast channel (BCCH) from the asynchronous radio network. The master information block is illustrated in Fig.
10 6.

Fig. 6 is a view showing data structure of a master information block included in a system information message.

The master information block of the system information message includes information elements related to a core network, in detail, a core network (CN) type information element, a public land mobile network (PLMN) identity element, a protocol revision (P_REV) element, a minimum
15 protocol revision (MIN_P_REV) element, a system identity element (SID) and a network identity element (NID).

These information elements mentioned above are important for the asynchronous mobile station. Accordingly, the information elements are included in the master information
20 block of the system information message periodically broadcasted.

The CN type information element represents the operating

type of the core network connected to the asynchronous mobile communication system. The CN type information element includes CN operating type information representing the operating type of the core network. In case that the core network is the GSM-MAP core network, the CN operating type information is set as "0" in this specification. In case of the ANSI-41 core network, the CN operating type information is set as "1". In case that both of the GSM-MAP and the ANSI-41 core network are coupled to the mobile communication system, the CN operating type information is set as "0 & 1".

The PLMN identity, which is related to the GSM-MAP core network, means an identity representing networks for the IMT-2000 system. The PLMN identity includes a mobile country code (MCC) indicating a nature or an area to which the asynchronous mobile station belongs, and a mobile network code indicating a network to which the asynchronous mobile station belongs.

The P_REV, the MIN_P_REV, the NID and the SID elements are related to the ANSI-41 core network.

The protocol revision element P_REV means a protocol revision of a call control (CC) and a mobility management (MM) entities of the ANSI-41 core network. The minimum protocol revision element MIN_P_REV means a minimum protocol revision of the CC and the MM entities admitted.

The asynchronous mobile station receives the P_REV, the MIN_P_REV, the NID and the SID from the master information block of the system information message, and compares the

MIN_P_REV with a mobile protocol revision (MOB_P_REV) stored on a memory or a user subscriber identity module. The asynchronous mobile station, based on the comparison result, determines whether the ANSI-41 core network can be selected.

5 Here, the MOB_P_REV means a protocol revision of a CC entity and a MM entity in the asynchronous mobile station.

10 If the CN operating type information indicates the asynchronous GSM-MAP and synchronous ANSI-41 core network, the asynchronous mobile station selects one core network based on a core network selection algorithm stored on the mobile station. The core network selection algorithm selects one core network according to a charging system, a capability of the mobile station, a capability of the asynchronous mobile communication system selected by the
15 mobile station and environments of the asynchronous radio network. The core network selection algorithm is stored in a memory or a user subscriber identity module of the mobile station.

20 For example, if the capability of the mobile station is used for selecting the core network, a number of transmission channels provided by the mobile station, a transmission power of the mobile station, kinds of systems supported by the mobile station, an occupied frequency band and kinds of services are considered.

25 The selection of the core network should be performed before setting a RRC connection, the information related to the selected core network should be transmitted to the

asynchronous radio network. For interfacing the mobile station with the radio network, the RRC connection should be performed. The RRC connection setting means that the mobile station communicates messages with the radio station based on the operating type of the selected core network.

Figs. 7A and 7B are flow charts illustrating a method for interfacing a message at an asynchronous radio network in accordance with the present invention.

An asynchronous radio network 220 detects an operating type of a core network connected thereto at step S111. In other words, the asynchronous radio network 220 obtains a CN operating type information indicating that the core network connected thereto is an asynchronous core network or a synchronous core network.

In order to obtain the operating type of the core network, a hardware device or a management/maintenance message is used. In other words, the asynchronous radio network discriminates the operating type of the core network based on information stored on a dip switch or a read only memory (ROM) at a system install, or based on information in the management/maintenance message received from the core network. Also, both of two methods can be used for obtaining the operating type of the core network.

At step S112, it is determined whether the core network is a GSM-MAP core network or an ANSI-41 core network.

If the core network is a GSM-MAP, a system information message defined in the present 3GPP specification is

transmitted to the asynchronous mobile station 210 at step S113.

In the system information message of this specification, if the core network is the GSM-MAP core network, the CN operating type information is written as "0" and the CN operating type information and information related to the core network are inserted. In other words, if the core network connected the asynchronous radio network is the GSM-MAP core network, the CN operating type information in a core network (CN) information elements field is set as "0", a public land mobile network (PLMN) identity, a core network (CN) domain identity and non-access stratum (NAS) system information are written in the information related to the core network. An information element category field and an UTRAN mobility information elements field are also written the information related to the core network.

The asynchronous radio network communicates a message having a data format defined in the 3GPP specification with the asynchronous mobile station at step S114.

On the contrary, if the core network is not the GSM-MAP core network, it is determined whether the core network is the ANSI-41 core network at step S115. If the core network is the ANSI-41 core network, a new system information message is generated and transmitted to the asynchronous mobile station at step S116. The new system information message includes new information elements related to the ANSI-41 core network. In the new system information message,

the CN operating type information is set as "1", a protocol revision level (P_REV), a minimum protocol revision level (MIN_P_REV), a system identification (SID) and a network identification (NID) are written as the information related to the core network.

An information element category field and an UTRAN mobility information elements field, which are the same as those in the conventional system information message, are also written the information related to the core network.

At step S117, messages having new information elements related to the synchronous ANSI-41 core network are communicated between the asynchronous mobile station and the asynchronous radio network.

If the core network is not the ANSI-41 core network, at determination result of the step S115, it is determined that a plurality of core networks each having a different operating type are coupled to the asynchronous radio network. In this specification, it is assumed that the synchronous ANSI-41 core network and the asynchronous GSM-MAP core network. A new system information message defined in the 3GPP specification is transmitted to the asynchronous mobile station.

In the new system information message, the CN operating type information is written as "0 & 1", and the CN operating type information and information related to the core networks are inserted.

It is determined whether a message is received from the

asynchronous mobile station at step S119. In the received message, information related to a core network selected by the asynchronous mobile station is included.

After receiving the message, at step S120, the asynchronous radio network determines whether the selected core network is a GSM-MAP core network or an ANSI-41 core network. If the selected core network is the GSM-MAP core network, the asynchronous radio network communicates a message having a data format defined in the 3GPP specification with the asynchronous mobile station at step S121. After this time, the asynchronous radio network is interfaced with the GSM-MAP core network.

If the selected core network is not the GSM-MAP core network, at step S122, it is determined whether the selected core network is the ANSI-41 core network.

If the selected core network is the ANSI-41 core network, a new system information message having new information elements related to the ANSI-41 core network is generated and transmitted to the asynchronous mobile station at step S123. After this time, the asynchronous radio network is interfaced with the ANSI-41 core network.

If the selected core network is neither the GSM-MAP core network nor the ANSI-41 core network, the process continues to the step S116 to transmit the system information message to the asynchronous mobile station.

After receiving the system information message having the CN operating type information, the asynchronous mobile

station selects one core network to be interfaced with based on the CN operating type information, and informs the asynchronous radio network of a selection result, which processes is illustrated in Figs. 8A and 8B.

5 Figs. 8A and 8B are flow charts illustrating a method for interfacing a message at an asynchronous mobile station in accordance with the present invention.

10 First, the asynchronous mobile station selects an asynchronous mobile communication system and receives the system information from the asynchronous radio network at steps S211 and S212. The asynchronous mobile station extracts the CN operating type information placed at a predetermined location of the system information message at step S213.

15 It is determined whether the CN operating type information indicates the asynchronous GSM-MAP core network at step S214. If the CN operating type information indicates the asynchronous GSM-MAP core network, the asynchronous mobile station operates asynchronous call control (CC) and mobility management (MM) entities and communicates a message
20 having a data format defined in the 3GPP specification with the asynchronous radio network at steps S215 and 216.

If the CN operating type information dose not indicate the asynchronous GSM-MAP core network, it is determined
25 whether the CN operating type information indicates the ANSI-41 core network at step S217.

If the CN operating type information indicates the

synchronous ANSI-41 core network, the asynchronous mobile station operates synchronous call control (CC) and mobility management (MM) entities and communicates a new message having new information elements related to the ANSI-41 core network with the asynchronous radio network at steps S218 and 219.

If the CN operating type information indicates the asynchronous GSM-MAP and synchronous ANSI-41 core network, the asynchronous mobile station selects one core network based on a core network selection algorithm which determines according to a charging system, a capability of the mobile station, a capability of the asynchronous mobile communication system selected by the mobile station and environments of the asynchronous radio network.

For example, if the capability of the mobile station is used for selecting the core network, a number of transmission channels provided by the mobile station, a transmission power of the mobile station, kinds of systems supported by the mobile station, an occupied frequency band and kinds of services are considered.

If the selected core network is the GSM-MAP core network, the asynchronous mobile station operates asynchronous CC and MM entities at step S222. Then, the asynchronous mobile station transmits information related to the selected core network to the asynchronous radio network through the message having the data format defined in the 3GPP specification at step S223. There are some ways that

the information related to the selected core network is transmitted to the asynchronous radio network. For example, there are a random access method, a method using conventional RRC messages and a method using new RRC messages newly defined.

Then, the asynchronous mobile station communicates messages having a data format defined in the 3GPP specification with the asynchronous radio network, with the asynchronous radio network at step 224.

If the selected core network is the ANSI-41 core network, the asynchronous mobile station operates synchronous CC and MM entities at step S226. Then, the asynchronous mobile station transmits information related to the selected core network through a new message having new information elements related to the ANSI-41 core network, and communicates messages having the new information elements at steps S227 and 228.

If the core network is neither the GSM-MAP core network nor the ANSI-41 core network, the process goes back to the step S212 to receive the system information.

In case that a plurality of core networks can be coupled to the asynchronous mobile communication system, the asynchronous radio network is interfaced with the core network selected by the asynchronous mobile station.

Therefore, a subscriber to the asynchronous mobile communication system can use a service provided in the synchronous ANSI-41 core network.

Figs. 9A to 9C are flow charts illustrating a method for interfacing a message at an synchronous mobile station in accordance with another embodiment of the present invention.

The asynchronous mobile station selects an asynchronous mobile communication system and receives the system information from the asynchronous radio network at steps S311 and S312. The asynchronous mobile station extracts the CN operating type information placed at a predetermined location of the system information message at step S313.

It is determined whether the CN operating type information indicates the asynchronous GSM-MAP core network at step S314. If the CN operating type information indicates the asynchronous GSM-MAP core network, the asynchronous mobile station operates asynchronous call control (CC) and mobility management (MM) entities and communicates a message having a data format defined in the 3GPP specification with the asynchronous radio network at steps S315 and S316.

If the CN operating type information does not indicate the asynchronous GSM-MAP core network, it is determined whether the CN operating type information indicates the ANSI-41 core network at step S317.

If the CN operating type information indicates the synchronous ANSI-41 core network, the asynchronous mobile station operates synchronous call control (CC) and mobility management (MM) entities and communicates a new message having new information elements related to the ANSI-41 core network with the asynchronous radio network at steps S318

and 319.

If the CN operating type information indicates the asynchronous GSM-MAP and synchronous ANSI-41 core network, the asynchronous mobile station extracts the PLMN_ID, the P_REV, MIN_P_REV, the NID and the SID from the master information block of the system information message at step S321.

At step s322, it is determined whether the extracted PLMN_ID is the same as that of the asynchronous mobile station and the MOB_P_REV of the asynchronous mobile station is larger than the extracted MIN_P_REV. If so, the asynchronous mobile station selects one core network according to a core network selection algorithm at step S323. Then, it is determined that the selected core network is GSM-MAP core network at step S324. The asynchronous mobile station operates asynchronous CC and MM entities at step S325.

The asynchronous mobile station informs the asynchronous radio network that the GSM-MAP core network is selected at step S326. Then, at step S327, the asynchronous mobile station communicates messages with asynchronous radio network, the message having a data format defined in the 3GPP specification.

If the selected core network is not the GSM-MAP core network, the asynchronous mobile station operates asynchronous CC and MM entities at step S328. At step S329, the asynchronous mobile station informs the asynchronous radio network that the ANSI-41 core network is selected.

Then, at step S330, the asynchronous mobile station communicates new messages with asynchronous radio network, the

new message having information elements related to the ANSI-41 core network.

At step S340, it is determined whether the extracted PLMN_ID is equal to the PLMN_ID of the mobile station and the
5 extracted MIN_P_REV is larger than the MOB_P_REV of the mobile station. If so, the mobile station selects the GSM-MAP core network and operate asynchronous CC and MM entities at step S341.

10 The asynchronous mobile station informs the asynchronous radio network that the GSM-MAP core network is selected at step S342. Then, the asynchronous mobile station communicates message having data format defined in 3gpp spec with the asynchronous radio network at step S343.

At step S344, it is determined whether the obtained
15 PLMN_ID is not equal to the PLMN_ID of the asynchronous mobile station and the obtained MIN_P_REV is equal to or smaller than the MOB_P_REV of the asynchronous mobile station. If so, the asynchronous mobile station selects the ANSI-41 core network and operate the synchronous CC and MM entities at step S345.

20 The asynchronous mobile station informs the asynchronous radio network that the ANSI-41 core network is selected, and communicates new messages having information elements related to the ANSI-41 core network with the asynchronous radio network at steps S346 and S347.

25 Although the preferred embodiments of the invention have been disclosed for illustrative purpose, those skilled in the art will be appreciate that various modifications, additions

and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

What is claimed is:

1. A method for transmitting a message between an asynchronous mobile communication system and at least a core network, the mobile communication system having a mobile station and a radio network, the method comprising the steps of:

a) at the radio network, discriminating an operating type of a core network(s) coupled thereto;

b) at the radio network, generating and transmitting a system information message having core network operating type information and information related to the core network;

c) at the mobile station, discriminating the operating type of the core network(s) based on the system information message;

d) if one core network is coupled to the asynchronous mobile communication system, operating a call control entity and a mobility management entity according to the operating type of the core network;

e) if two or more core networks are coupled to the asynchronous mobile communication system, at the mobile station, selecting one core network to be communicated with, based on the system information message;

f) operating a call control entity and a mobility management entity according to an operating type of the selected core network;

g) informing the radio network of information related to

the selected core network; and

h) communicating messages between the mobile station and the radio network, the message having a different data format according to the operating type of the core network.

5

2. The method as recited in claim 1, wherein the step a) includes:

a1) receiving core network operating type information; and

10 a2) determining whether the core network connected to the asynchronous mobile communication system is a synchronous core network, asynchronous core network or both of the synchronous and the asynchronous core networks, based on the operating type of the core network.

15

3. The method as recited in claim 2, wherein the step b) includes:

b1) if the core network coupled is the asynchronous core network, setting the core network operating type information
20 in the system information message as "0";

b2) if the core network coupled is the synchronous core network, setting the core network operating type information as "1"; and

25 b3) if both of the asynchronous core network and the synchronous core network are coupled to the mobile communication system, setting the core network operating type information as "0 & 1".

4. The method as recited in claim 1, wherein the step c) includes the steps of:

c1) receiving the system information message;

5 c2) extracting the core network operating type information from the system information message;

5. The method as recited in claim 4, wherein the step e) includes the steps of:

10 e1) if the core network operating type information represents that two core networks are coupled thereto, extracting the information related to the core network from the system information message;

15 e2) comparing the information related to the core network with information stored in the mobile station and corresponding to the information related to the core network; and

e3) selecting one core network to be coupled thereto based on a comparison result.

20

6. The method as recited in claim 3, wherein the core network operating type information and the information related to the core network are inserted into a master information block of the system information block.

25

7. The method as recited in claim 5, wherein the system information message is transmitted to the mobile station

through a broadcast channel (BCCH).

8. The method as recited in claim 1, wherein, if the selected core network is of the synchronous operating type,
5 the message includes new information elements related to the synchronous core network.

9. The method as recited in claim 5, wherein, if the core network coupled to the asynchronous mobile communication system is of the asynchronous operating type, the information
10 related to the core network includes a public land mobile network (PLMN) identity.

10. The method as recited in claim 5, wherein, if the core network coupled to the asynchronous mobile communication system is of the synchronous operating type, the information
15 related to the core network includes a protocol revision (P_REV), a minimum protocol revision (MIN_P_REV), a network identity (NID) and a system identity (SID).

20 11. The method as recited in claim 5, wherein, if the core network coupled to the asynchronous mobile communication system is of the synchronous operating type, the information related to the core network includes a public land mobile
25 network (PLMN) identity, a protocol revision (P_REV), a minimum protocol revision (MIN_P_REV), a network identity (NID) and a system identity (SID).

12. The method as recited in claim 11, wherein the step e2) includes the steps of:

e21) if the extracted PLMN identity is equal to a PLMN identity of the mobile station and the extracted MIN_P_REV is larger than a mobile protocol revision (MOB_P_REV) of the mobile station, selecting the asynchronous core network;

e22) if the extracted PLMN identity is not equal to the PLMN identity of the mobile station and the extracted MIN_P_REV is equal to or smaller than the MOB_P_REV of the mobile station, selecting the synchronous core network; and

e23) if the extracted PLMN identity is equal to the PLMN identity of the mobile station and the extracted MIN_P_REV is equal to or smaller than the MOB_P_REV of the mobile station, selecting the synchronous core network by using a core network selection method.

13. The method as recited in claim 12, wherein, if the core network is neither the asynchronous core network nor the synchronous core network, going back to step c1).

14. The method as recited in claim 12, wherein in the core network selection method, one core network is selected based on a number of transmission channels, a kind of systems and a kind of service provided by the mobile station, a transmission power of the mobile station and a frequency band occupied by the mobile station.

15. A method for transmitting a message between an asynchronous mobile communication system and at least a core network, the mobile communication system having a mobile station and a radio network, the method comprising the steps of:

a) at the radio network, discriminating an operating type of a core network(s) coupled thereto;

b) generating and transmitting a system information message having core network operating type information and information related to the core network;

c) if one core network is coupled to the asynchronous mobile communication system, communicating messages between the mobile station and the radio network, the message having a different data format according to the operating type of the core network;

d) if two or more core networks are coupled to the asynchronous mobile communication system, receiving an operating type of a core network selected by the mobile and communicating messages between the mobile station and the radio network, the message having a different data format according to the operating type of the core network.

16. The method as recited in claim 15, wherein the step a) includes:

a1) receiving core network operating type information; and

a2) determining whether the core network connected to the

asynchronous mobile communication system is a synchronous core network, asynchronous core network or both of the synchronous and the asynchronous core networks, based on the operating type of the core network.

5

17. The method as recited in claim 16, wherein the step b) includes:

b1) if the core network coupled is the asynchronous core network, setting the core network operating type information in the system information message as "0";

b2) if the core network coupled is the synchronous core network, setting the core network operating type information as "1"; and

b3) if both of the asynchronous core network and the synchronous core network are coupled to the mobile communication system, setting the core network operating type information as "0 & 1".

18. A method for transmitting a message between an asynchronous mobile communication system and at least a core network, the mobile communication system having a mobile station and a radio network, the method comprising the steps of:

a) at the mobile station, discriminating the operating type of the core network(s) based on a system information message received from the radio network;

b) if one core network is coupled to the asynchronous

mobile communication system, operating a call control entity and a mobility management entity according to the operating type of the core network;

5 c) if two or more core networks are coupled to the asynchronous mobile communication system, at the mobile station, selecting one core network to be communicated with, based on the system information message;

10 d) operating a call control entity and a mobility management entity according to an operating type of the selected core network;

11 e) informing the radio network of information related to the selected core network; and

12 f) communicating messages between the mobile station and the radio network, the message having a different data format
15 according to the operating type of the core network.

19. The method as recited in claim 18, wherein the step a) includes the steps of:

20 a1) receiving the system information message;
a2) extracting the core network operating type information from the system information message;

20. The method as recited in claim 19, wherein the step c) includes the steps of:

25 c1) if the core network operating type information represents that two core networks are coupled thereto, extracting the information related to the core network from

the system information message;

c2) comparing the information related to the core network with information stored in the mobile station and corresponding to the information related to the core network;

5 and

c3) selecting one core network to be coupled thereto based on a comparison result.

10 21. The method as recited in claim 19, wherein the core network operating type information and the information related to the core network are inserted into a master information block of the system information block.

15 22. The method as recited in claim 21, wherein the system information message is transmitted to the mobile station through a broadcast channel (BCCH).

20 23. The method as recited in claim 18, wherein, if the selected core network is of the synchronous operating type, the message includes new information elements related to the synchronous core network.

25 24. The method as recited in claim 20, wherein, if the core network coupled to the asynchronous mobile communication system is of the asynchronous operating type, the information related to the core network includes a public land mobile network (PLMN) identity.

25. The method as recited in claim 20, wherein, if the core network coupled to the asynchronous mobile communication system is of the synchronous operating type, the information related to the core network includes a protocol revision (P_REV), a minimum protocol revision (MIN_P_REV), a network identity (NID) and a system identity (SID).

26. The method as recited in claim 20, wherein, if the core network coupled to the asynchronous mobile communication system is of the synchronous operating type, the information related to the core network includes a public land mobile network (PLMN) identity, a protocol revision (P_REV), a minimum protocol revision (MIN_P_REV), a network identity (NID) and a system identity (SID).

27. The method as recited in claim 21, wherein the step e2) includes the steps of:

e21) if the extracted PLMN identity is equal to a PLMN identity of the mobile station and the extracted MIN_P_REV is larger than a mobile protocol revision (MOB_P_REV) of the mobile station, selecting the asynchronous core network;

e22) if the extracted PLMN identity is not equal to the PLMN identity of the mobile station and the extracted MIN_P_REV is equal to or smaller than the MOB_P_REV of the mobile station, selecting the synchronous core network; and

e23) if the extracted PLMN identity is equal to the PLMN identity of the mobile station and the extracted MIN_P_REV is

equal to or smaller than the MOB_P_REV of the mobile station, selecting the synchronous core network by using a core network selection method.

5 28. The method as recited in claim 27, wherein, if the core network is neither the asynchronous core network nor the synchronous core network, going back to step c1).

10 29. The method as recited in claim 27, wherein in the core network selection method, one core network is selected based on a number of transmission channels, a kind of systems and a kind of service provided by the mobile station, a transmission power of the mobile station and a frequency band occupied by the mobile station.

15

Abstract of the Disclosure

A method for The method for transmitting a message between a mobile communication system and at least a core network, the mobile communication system having a mobile station and a radio network, the method comprising the steps of: a) at the radio network, discriminating an operating type of a core network(s) coupled thereto; b) at the radio network, generating and transmitting a system information message having core network operating type information and information related to the core network; c) if two or more core networks are coupled to the asynchronous mobile communication system, at the mobile station, selecting one core network to be communicated with, based on the system information message; d) operating a call control entity and a mobility management entity according to an operating type of the selected core network; and e) communicating messages between the mobile station and the radio network, the message having a different data format according to the operating type of the selected core network.

FIG. 1A
(PRIOR ART)

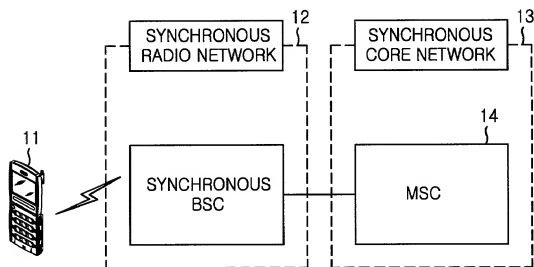


FIG. 1B
(PRIOR ART)

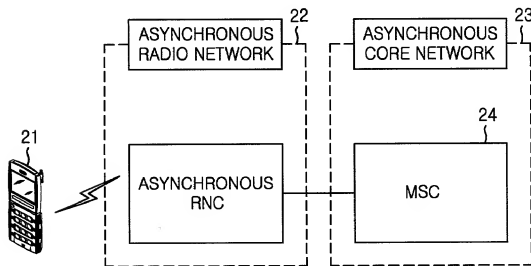


FIG. 2A
(PRIOR ART)

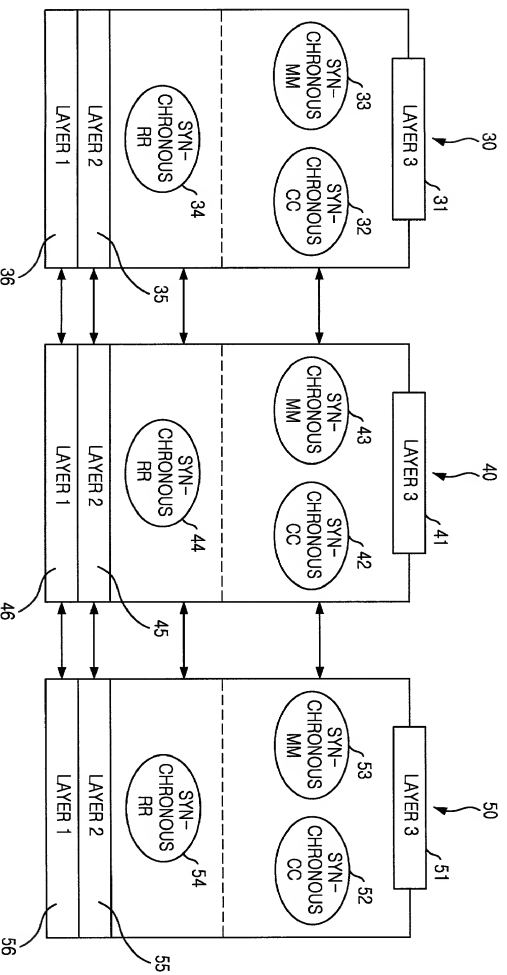


FIG. 2B
(PRIOR ART)

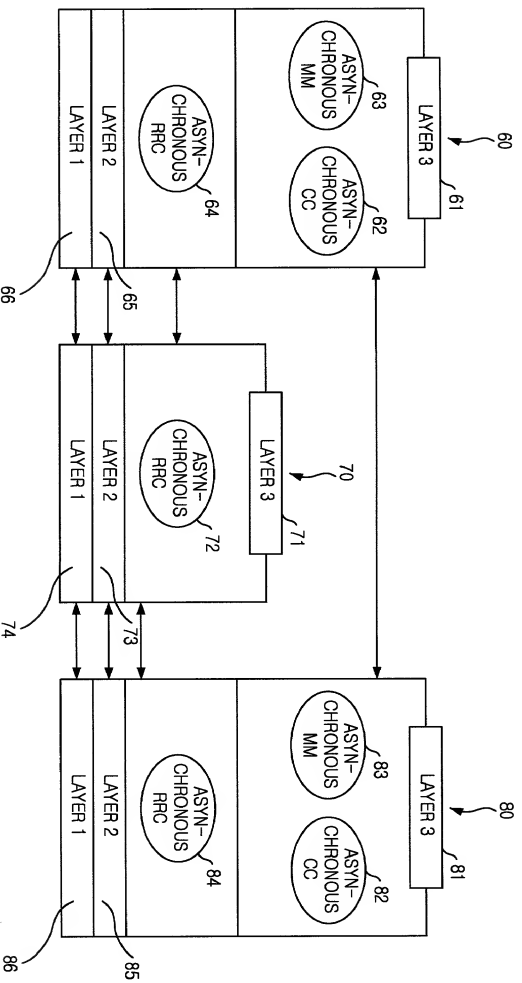


FIG. 3A

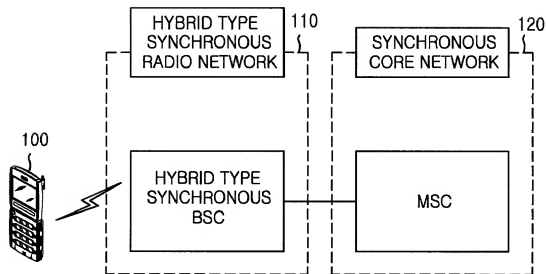


FIG. 3B

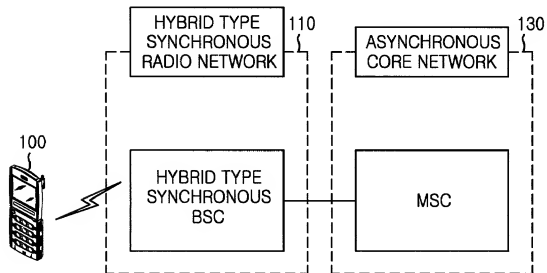


FIG. 3C

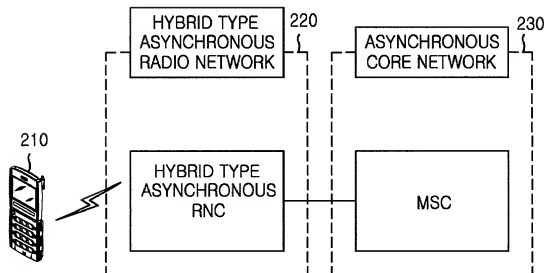


FIG. 3D

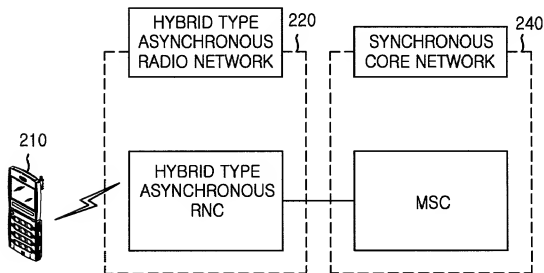


FIG. 4A

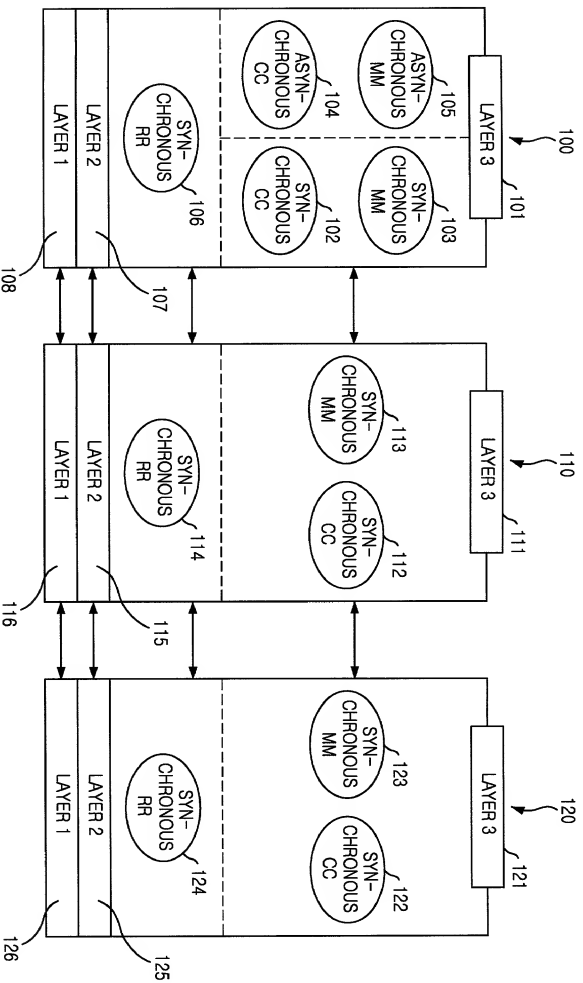


FIG. 4B

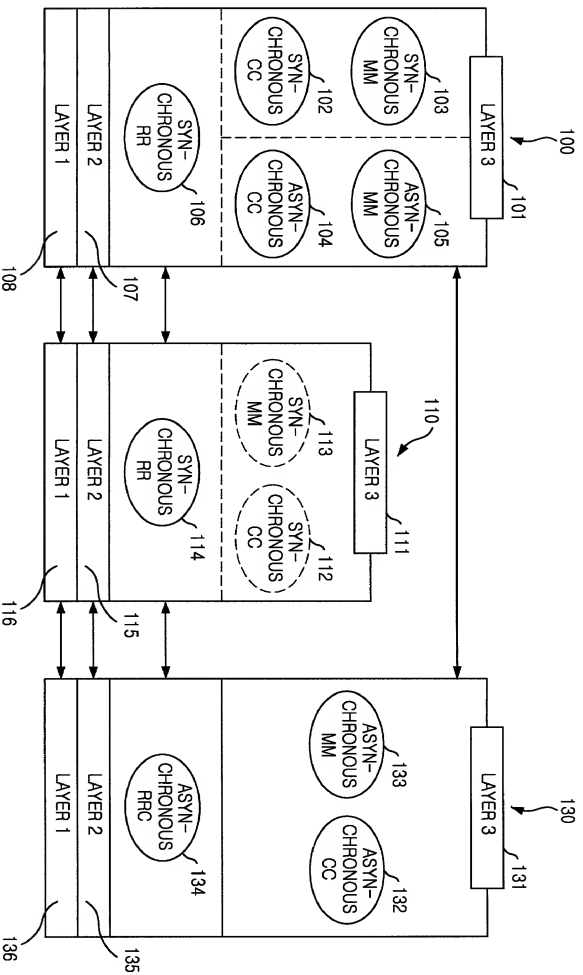


FIG. 4C

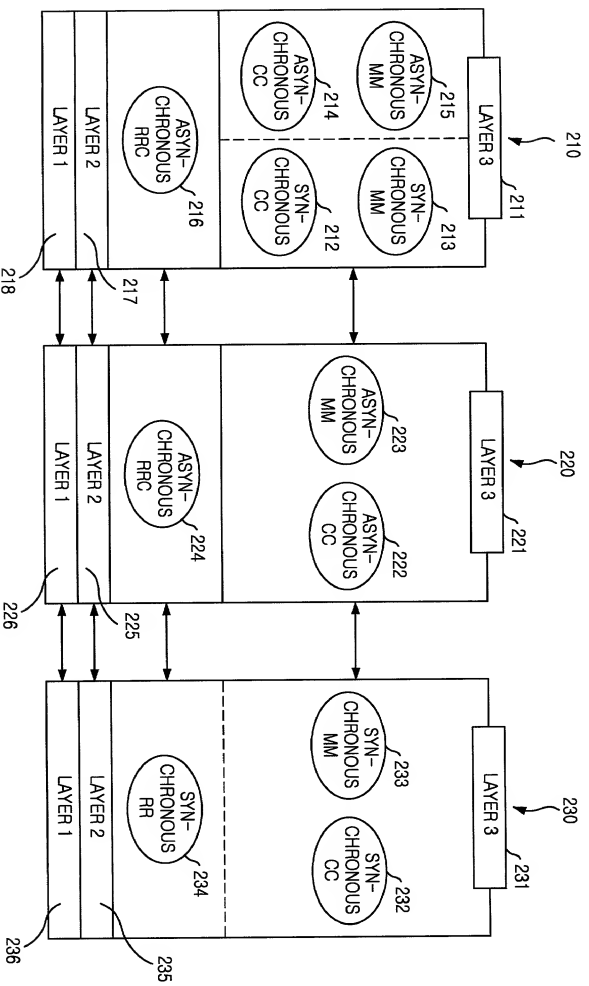


FIG. 4D

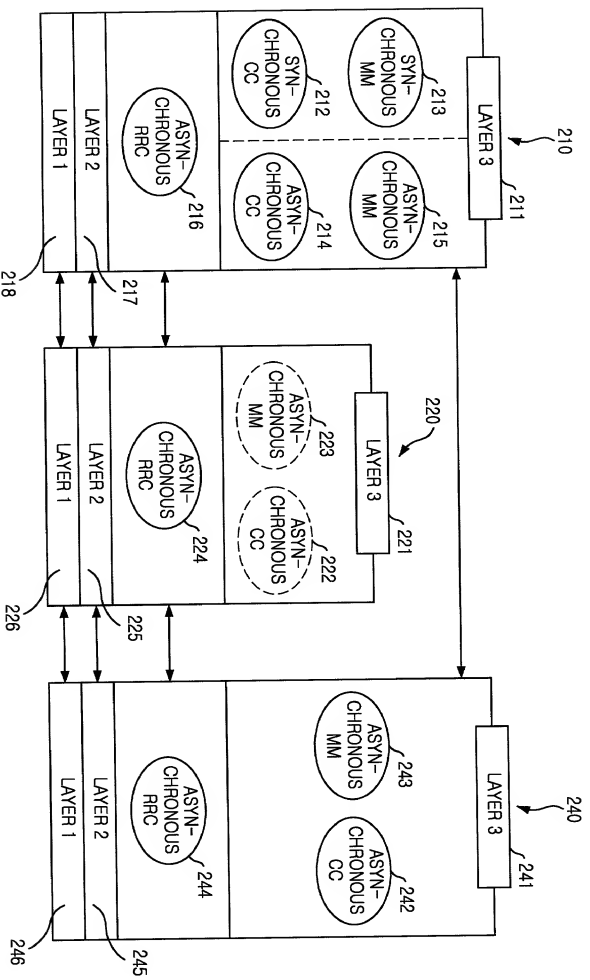


FIG. 5

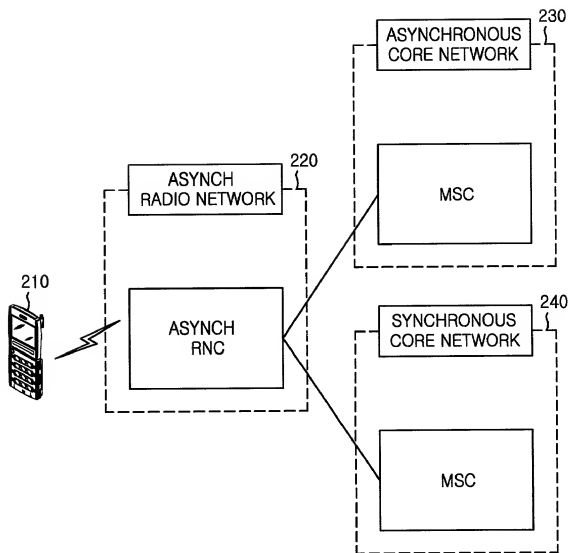


FIG. 6

INFORMATION ELEMENT	PRESENCE	RANGE	IE TYPE AND REFERENCE	SEMANTICS DESCRIPTION
OTHER INFORMATION ELEMENTS				
VALUE TAG	M			
REFERENCES TO OTHER SYSTEM INFORMATION BLOCKS		1.. <maxSysinfo Blockcount>		
SCHEDULING INFORMATION	M			
CN INFORMATION ELEMENTS				
CN TYPE	M		Enumerated (GSM-MAP, ANSI-41, GSM-MAP AND ANSI-41)	
PLMN ID	C-GSM			
ANSI-41 INFORMATION ELEMENT	C-ANSI			
P_REV	M			
MIN_P_REV	M			
SID	M			
NID	M			

FIG. 7A

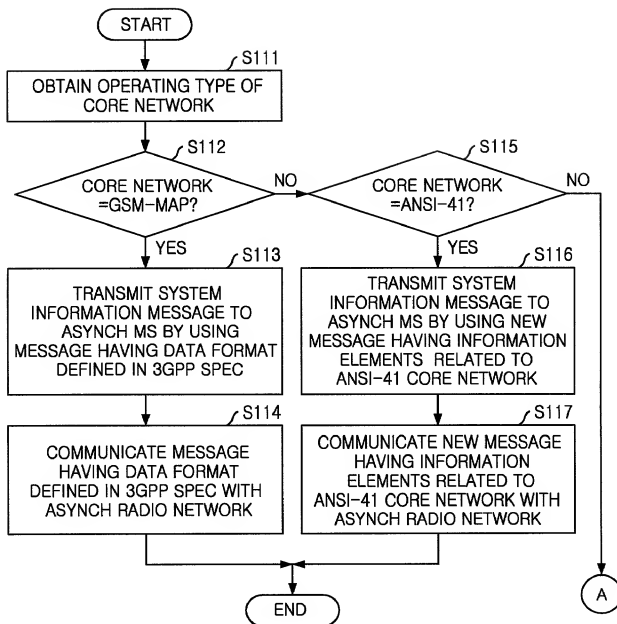


FIG. 7B

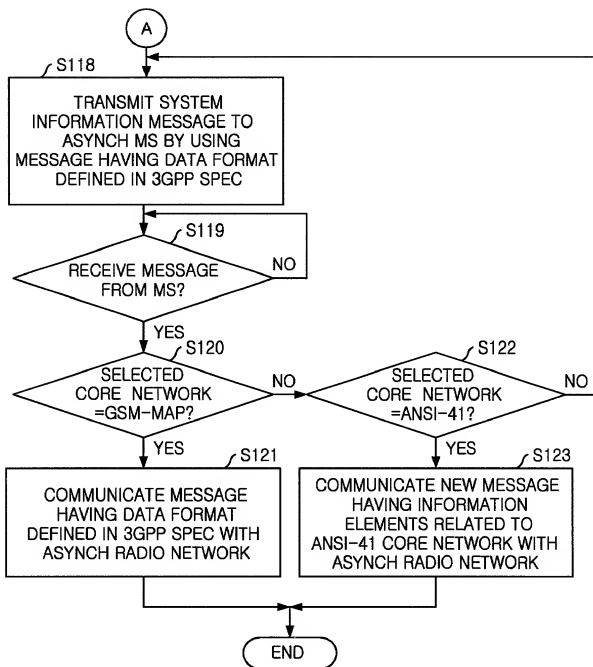


FIG. 8A

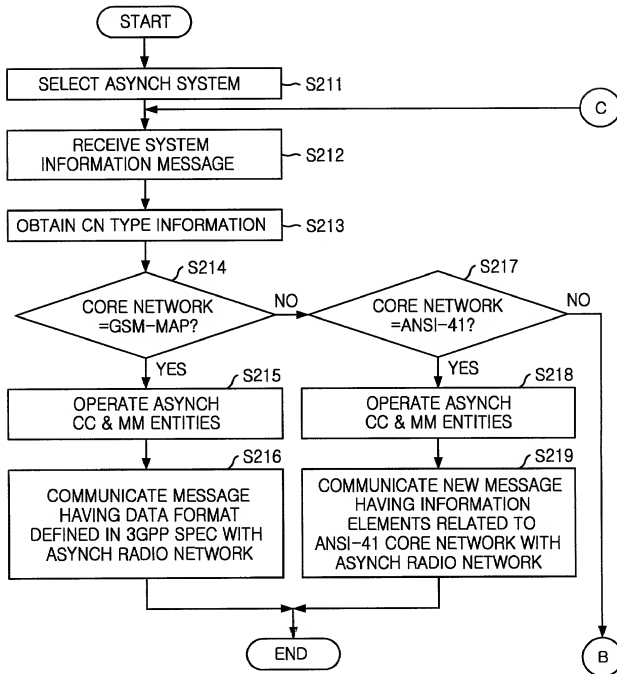


FIG. 8B

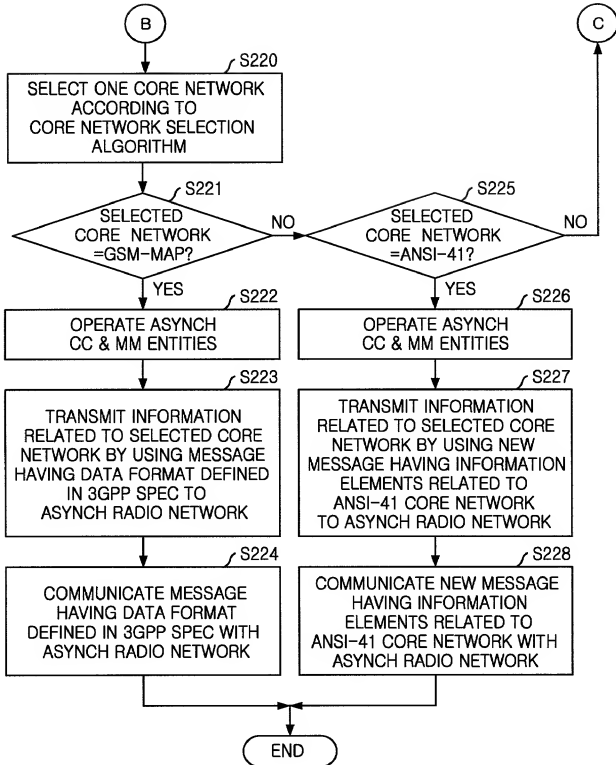


FIG. 9A

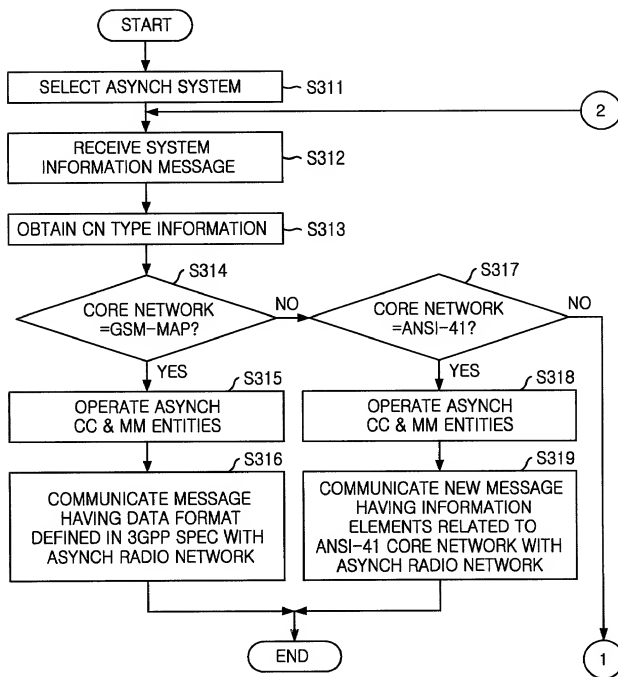


FIG. 9B


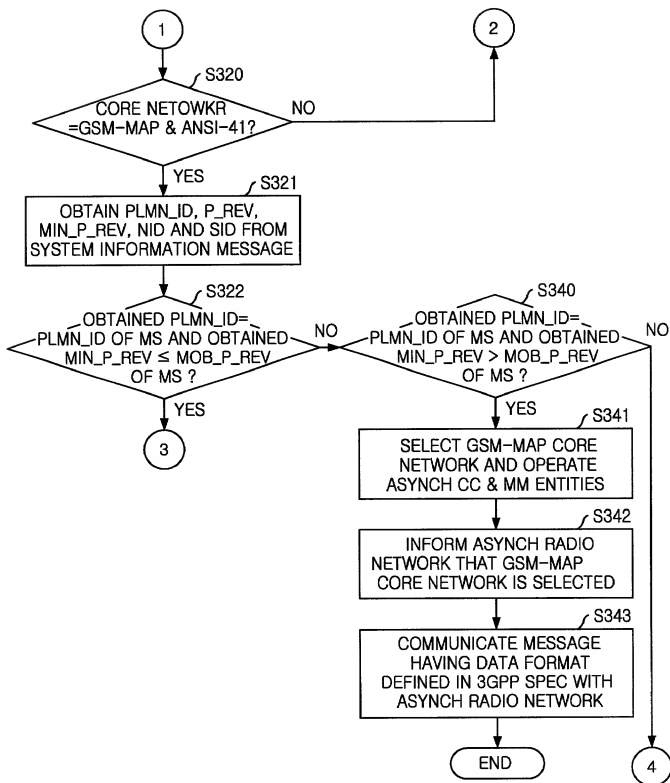


FIG. 9C

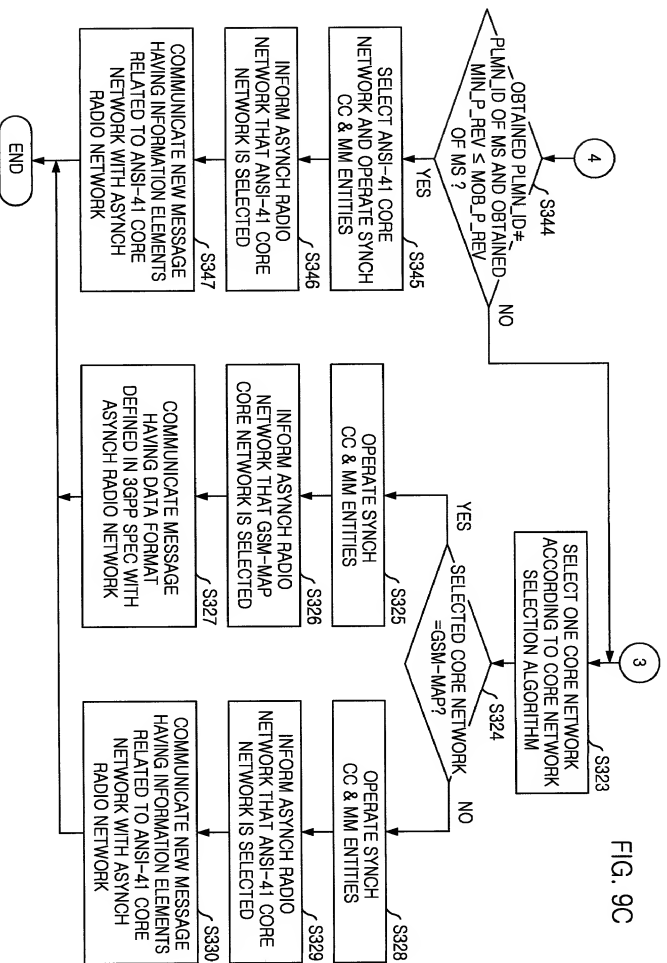

COMBINED DECLARATION AND POWER OF ATTORNEY

(Original, Design, National Stage of PCT, Divisional, Continuation or C-I-P Application)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR INTERFACING ASYNCHRONOUS MOBILE COMMUNICATION
SYSTEM WITH AT LEAST ONE CORE NETWORK

This declaration is of the following type:

- ☒ [x] original
☐ [] design
☐ [] national stage of PCT
☐ [] divisional
☐ [] continuation
☐ [] continuation-in-part (C-I-P)

the specification of which: *(complete (a), (b), or (c))*

- (a) ☒ [X] is attached hereto.
(b) ☐ [] was filed on _____ as Application Serial No. _____ and was amended
on _____ (if applicable).
(c) ☐ [] was described and claimed in PCT International Application No. _____ filed on
_____ and was amended on _____ (if applicable).

Acknowledgement of Review of Papers and Duty of Candor

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the subject matter claimed in this application in accordance with Title 37, Code of Federal Regulation § 1.56.

[] In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.98.

Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(b) of any foreign application(s) for patent or inventor's certificate or of any PCT International Application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International Application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application on which priority is claimed

(complete (d) or (e))

- (d) ☐ [] no such applications have been filed.
(e) ☒ [x] such applications have been filed as follows:

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION				
COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, year)	DATA OF ISSUE (day, month, year)	PRIORITY CLAIMED UNDER 35 USC119
Republic of Korea	1999-46999	28/10/1999		[x] YES NO []
Republic of Korea	1999-51355	18/11/1999		[x] YES NO []
				[] YES NO []
ALL FOREIGN APPLICATION(S), IF ANY, FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION				
				[] YES NO []
				[] YES NO []
				[] YES NO []

Claim for Benefit of Prior U.S. Provisional Application(s)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Provisional Application Number	Filing Date

Claim for Benefit of Earlier U.S./PCT Application(s) under 35 U.S.C. 120

(complete this part only if this is a divisional, continuation or C-I-P application)

I here by claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status(patented, pending, abandoned))
(Application Serial No.)	(Filing Date)	(Status(patented, pending, abandoned))

Power of Attorney

As a named inventor, I hereby appoint Dana M. Raymond, Reg. No. 18,540; Frederick C. Carver, Ref. No. 17,021; Francis J. Hone, Reg. No. 18,662; Joseph D. Garon, Reg. No. 20,420; Arthur S. Tenser, Reg. No. 18,839; Ronald B. Hildreth, Reg. No. 19,498; Thomas R. Nesbitt, Jr., Reg. No. 22, 075; Robert Neuner, Reg. No. 24,316; Richard G. Berkley, Reg. No. 25,465; Richard S. Clark, Reg. No. 26,154; Bradley B. Geist, Reg. No. 27,551; James J. Maune, Reg. No. 26,946; John D. Murnane, Reg. No. 29,836; Henry Tang, Reg. No. 29,705; Robert C. Scheinfeld, Reg. No. 31,300; John A. Fogarty, Jr., Reg. No. 22,348; Louis S. Sorell, Reg. No. 32,439; Rochelle K. Seide Reg. No. 32,300; Gary M. Butter, Reg. NO. 33,841; Marta E. Delsignore, Reg. No. 32,689; and Lisa B. Kole, Reg. No. 35,225 of the firm of BAKER BOTTS L.L.P., with offices at 30 Rockefeller Plaza, New York, New York 10112, as attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

SEND CORRESPONDENCE TO: BAKER BOTTS L.L.P. 30 ROCKEFELLER PLAZA, NEW YORK, N.Y. 10112 CUSTOMER NUMBER: 21003	DIRECT TELEPHONE CALLS TO: BAKER BOTTS L.L.P. (212)705-5000
---	--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both,

under Section 1001 of Title 18 of the United States Code and that such willful false statement may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR	LAST NAME PARK	FIRST NAME JAE-HONG	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY Ichon-shi	STATE or FOREIGN COUNTRY Kyoungki-do, Korea	COUNTRY OF CITIZENSHIP Korea
POST OFFICE ADDRESS	POST OFFICE ADDRESS San 136-1, Ami-ri, Bubal-eub	CITY Ichon-shi, Kyoungki-do	STATE or COUNTRY Korea ZIP CODE 467-860
DATE 05/10/2000	SIGNATURE OF INVENTOR JAEHONG PARK		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	LAST NAME HWANG	FIRST NAME WOON-HEE	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY Ichon-shi	STATE or FOREIGN COUNTRY Kyoungki-do, Korea	COUNTRY OF CITIZENSHIP Korea
POST OFFICE ADDRESS	POST OFFICE ADDRESS San 136-1, Ami-ri, Bubal-eub	CITY Ichon-shi, Kyoungki-do	STATE or COUNTRY Korea ZIP CODE 467-860
DATE 25/08/2000	SIGNATURE OF INVENTOR WOONHEE HWANG		
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	LAST NAME YE	FIRST NAME JEONG-HWA	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY Ichon-shi	STATE or FOREIGN COUNTRY Kyoungki-do, Korea	COUNTRY OF CITIZENSHIP Korea
POST OFFICE ADDRESS	POST OFFICE ADDRESS San 136-1, Ami-ri, Bubal-eub	CITY Ichon-shi, Kyoungki-do	STATE or COUNTRY Korea ZIP CODE 467-860
DATE 05/10/2000	SIGNATURE OF INVENTOR JEONG HWA YE		
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY	LAST NAME	FIRST NAME	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE or COUNTRY ZIP CODE
DATE	SIGNATURE OF INVENTOR		
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY	LAST NAME	FIRST NAME	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE or COUNTRY ZIP CODE
DATE	SIGNATURE OF INVENTOR		
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY	LAST NAME	FIRST NAME	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE or COUNTRY ZIP CODE
DATE	SIGNATURE OF INVENTOR		
FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY	LAST NAME	FIRST NAME	MIDDLE NAME
RESIDENCE & CITIZENSHIP	CITY	STATE or FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE or COUNTRY ZIP CODE
DATE	SIGNATURE OF INVENTOR		

Check proper box(es) for any added page(s) forming a part of this declaration

[] Signature for ninth and subsequent joint inventors. Number of pages added _____.

- [] Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor.
Number of pages added _____.
- [] Signature for inventor who refuses to sign, or cannot be reached, by person authorized under 37 CFR 1.47.
Number of pages added _____.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219